




AC4420 Series

Uncooled 2.5 Gbps 1550 nm Fabry Perot Laser in TOSA Package

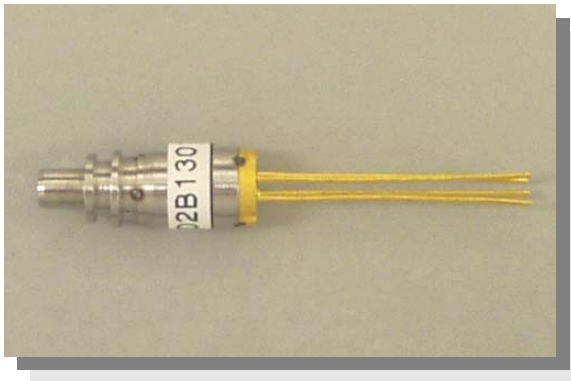

monitoring. This high performance, and high reliability laser is suitable for applications up to 2.5 Gb/s in short haul links or local networks, including OC-48 applications.

Features

- 1550 nm typical emission wavelength
- Wide operation temperature range (from -40 to 70°C)
- High Reliability
- Multi-quantum Well (MQW) active layer

Description

The AC4420 series lasers are uncooled semiconductor InAlGaAs Fabry Perot laser working at 1550 nm wavelength. The device is delivered in hermetic TOSA package with photodiode for optical power

Applications

- Telecommunication
- Data Communication
- Storage area networks

Absolute Maximum Rating

Parameter	Symbol	Ratings	Unit
Forward Current (Laser Diode)	I_{OL}	100	mA
Reverse Voltage (Laser Diode)	V_{RL}	2	V
Reverse Voltage (Photodiode)	V_{RD}	20	V
Forward Current (Photodiode)	I_{FD}	2	mA
Case Temperature	T_C	$-40 \sim +70$	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	$-40 \sim +100$	$^{\circ}\text{C}$

Electrical/Optical Characteristics (T_c=25°C)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Threshold Current	I _{th}	CW		10	15	mA
		CW at 70° C		24	32	
Output Power	P _o	CW, I _o = I _{th} + 20mA	L	0.3		mW
			M	0.5		
Operating Voltage	V _{op}	CW, T _c = -40° C ~ +70° C		1.1	1.5	V
Center Wavelength	λ _c	CW	1520	1550	1580	nm
Spectral Width (RMS)	Δλ	CW, T _c = -40° C ~ +70° C		2	4	nm
Tracking Error	ΔP _o	P _o (I _o = I _{th} + 20mA, 25° C) T _c = -40° C ~ +70° C		-1.0		dB
Rise and fall Time	T _r , T _f	I _f = I _{th} , I _b = I _{th} , 10~90%		100	120	ps
Monitor Current	I _m	CW, V _{RD} = 1V	0.1			mA
Monitor Dark Current	I _d	V _{RD} = 10V			0.1	μA
Capacitance	C _t	V _{RD} = 10V, f = 1MHz		10	20	pF

Ordering Information:

AC4420-X-Y

X=A, or B for the pin-out configurations (See next page)

Y=L, M for the output power

Archcom Technology, Inc. reserves the right to make changes in design, specifications and other information at any time without prior notice. Information in this data sheet is believed to be reliable. However, no responsibility is assumed for possible inaccuracy or omission.

Outline Drawings

(Customer package designs are available)

